



USER MANUAL

LED GROW LIGHT



CONTENTS

I	SAFETY GUIDELINES	- 01	V	OPERATING INSTRUCTIONS (ENGLISH)	- 07
	• Caution • Warning			• Operation Precautions • Dimming Controller Instructions • Connection Instructions • Growing Tips	
II	TECHNICAL SPECIFICATIONS	- 02	VI	BEDIENUNGSANLEITUNG (DEUTSCH)	- 09
III	ASSEMBLY INSTRUCTIONS (ENGLISH)	- 03		• Vorsichtsmaßnahmen für den Betrieb • Dimmersteuerung Anweisungen • Verbindungsanweisungen • Wachstumstipps	
	• Part List • Assembly Steps		VII	CARE AND MAINTENANCE	- 11
IV	MONTAGEANLEITUNG (DEUTSCH)	- 05	VIII	RETURN AND WARRANTY	- 11
	• Liste der Teile • Installationsschritte		IX	CUSTOMER SUPPORT	- 12

○ Disclaimer

Make sure you read and understand this manual completely before using your NovaGrove Product. We are not and cannot be held responsible for any damage or injury incurred due to improper or unsafe use of the NovaGrove Product. We specifically disclaim responsibility for any bodily injury or property damage that may occur during any use that does not comply with applicable federal, state, or local laws or ordinances.

I. SAFETY GUIDELINES


1. Caution

- Before installation and operation, carefully read this manual and keep it properly for future reference.
- Ensure the power is turned off before performing any operations.
- Damage caused by improper operation is not covered under warranty.
- It is recommended to wear protective gloves and goggles during installation.
- Keep this product out of reach of children.
- Use a stable and secure platform during installation and maintenance.

2. ⚠ Warning

- Keep power cords away from high-temperature surfaces.
- Use only the specified voltage and provided plug, and avoid overloading the timer in series configurations.
- Maintain a minimum distance of 50 cm between the luminaire and flammable or explosive materials.
- Ensure at least 1 inch (2.5 cm) of clearance above the luminaire for proper heat dissipation.
- Use appropriate rigging and hooks to suspend the luminaire, ensuring the hanging point's weight capacity is within safe limits.
- Do not place an operating luminaire face-down on a flat surface.
- Do not cover or enclose the light engine or driver.
- Improper installation may cause injury or material damage.
- Avoid contact with exposed wiring to prevent electric shock.
- Discontinue use if:
 - The power cord or plug is damaged.
 - The luminaire is exposed to water or rain.
 - Performance degrades or the housing is damaged.
 - The unit is dropped or mishandled.
- Never look directly at the luminaire without protective eyewear.
- LED surfaces may become extremely hot. Allow to cool completely (≥30 minutes) before handling.
- Do not disassemble, modify, or repair the luminaire without manufacturer authorization.
- Seek professional service if any of the following occur:
 - Damaged power cord or plug.
 - Water exposure or rain ingress.
 - Reduced performance or housing damage.
 - Impact from dropping or improper handling.

II. TECHNICAL SPECIFICATIONS

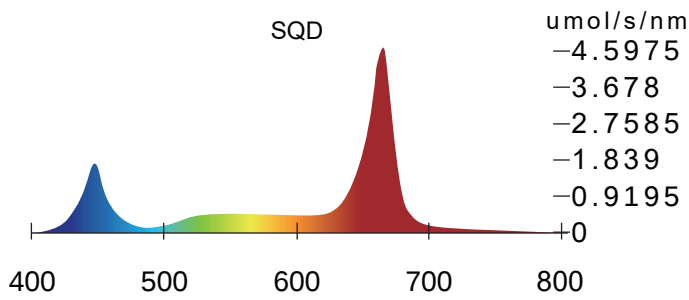

6369-GL-EC10 (100W)

Input Voltage	220-240V	PPF	246 $\mu\text{mol/s}$
Max Output Power	100W	PPE	2.51 $\mu\text{mol/J}$
Light Size	30.5 × 24.5 × 7 cm	Coverage	60 × 120 cm
Spectrum	Full Spectrum	Weight	1.75 kg
Operating Temperature	≤30℃	LED Quantity	Red 30, White 54


6369-GL-EC20 (200W)


Input Voltage	220-240V	PPF	497.5 $\mu\text{mol/s}$
Max Output Power	200W	PPE	2.513 $\mu\text{mol/J}$
Light Size	55.3 × 24.5 × 7 cm	Coverage	60 × 120 cm
Spectrum	Full Spectrum	Weight	2.45 kg
Operating Temperature	≤30℃	LED Quantity	Red 60, White 108

III. ASSEMBLY INSTRUCTIONS

- Notice
- Please read this manual carefully before use.
 - Only use replacement parts from NovaGrove.
 - If anything is missing or damaged, please contact us immediately at Pfillo.de@gmail.com


1. Part List

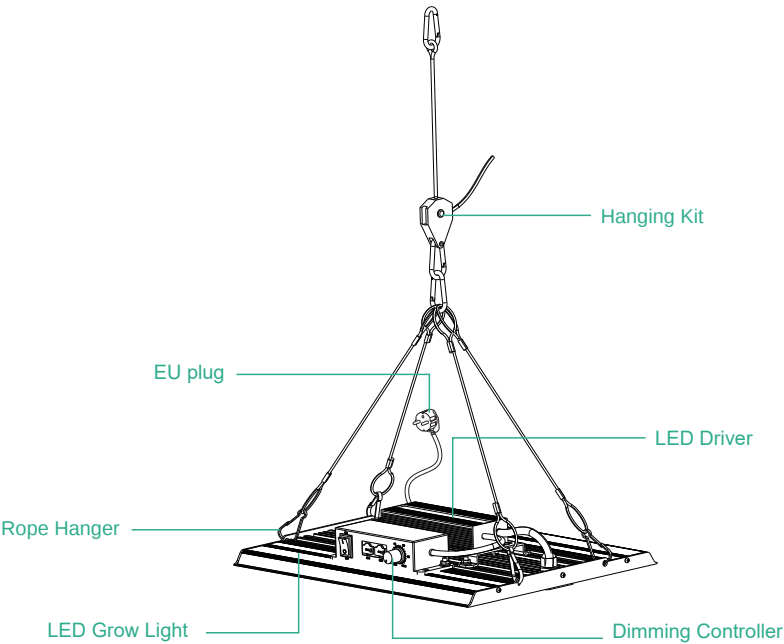


A  LED Grow Light ×1	B  Hanging Kit ×1	C  Rope Hangers ×1	D  Dimming Cable ×1	E  Port Stopper ×2
---	--	---	--	---

2. Assembly Steps

Step 1 - Install the four rope hangers to the LED light.



Step 2 - Connect the hanging kit, hang the light on the bar, and install the network port plugs.

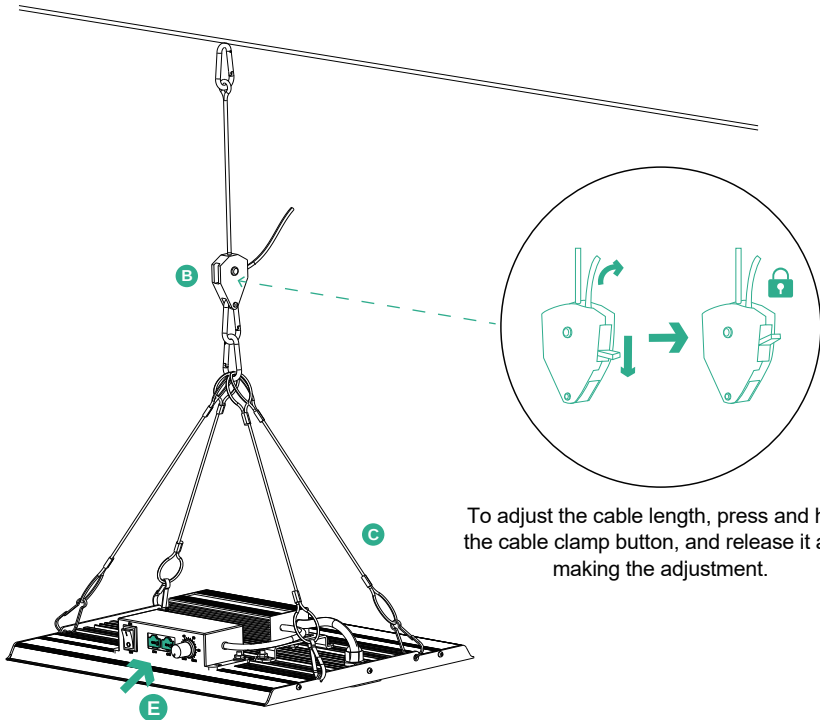


IV. MONTAGEANLEITUNG

■ Hinweis

- Bitte lesen Sie diese Anleitung vor dem Gebrauch sorgfältig durch.
- Verwenden Sie nur die Ersatzteile von NovaGrove.
- Sollte etwas fehlen oder beschädigt sein, setzen Sie sich bitte sofort mit uns in Verbindung (Pfillo.de@gmail.com)


1. Liste der Teile

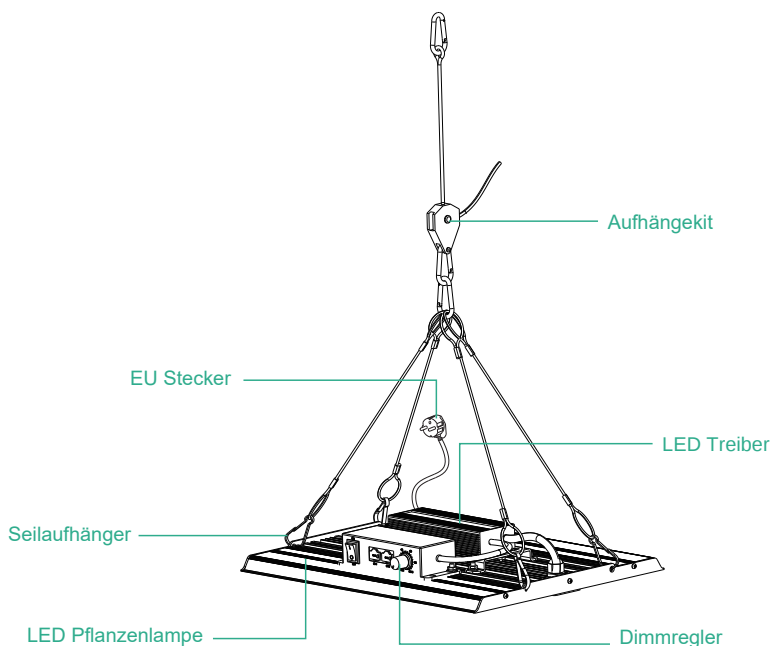


A  LED Pflanzenlampe×1	B  Aufhängekit×1	C  Seilaufhänger×1	D  Netzkabel×1	E  Abschlussstopfen×2
--	---	---	---	--

2. Installationsschritte

Schritt 1 - Installieren Sie die vier Seilhänger an der LED Lampe.



Schritt 2 - Verbinden Sie das Aufhänageset, hängen Sie das Licht an die Stange und installieren Sie die Netzwerkport-Stopfen.

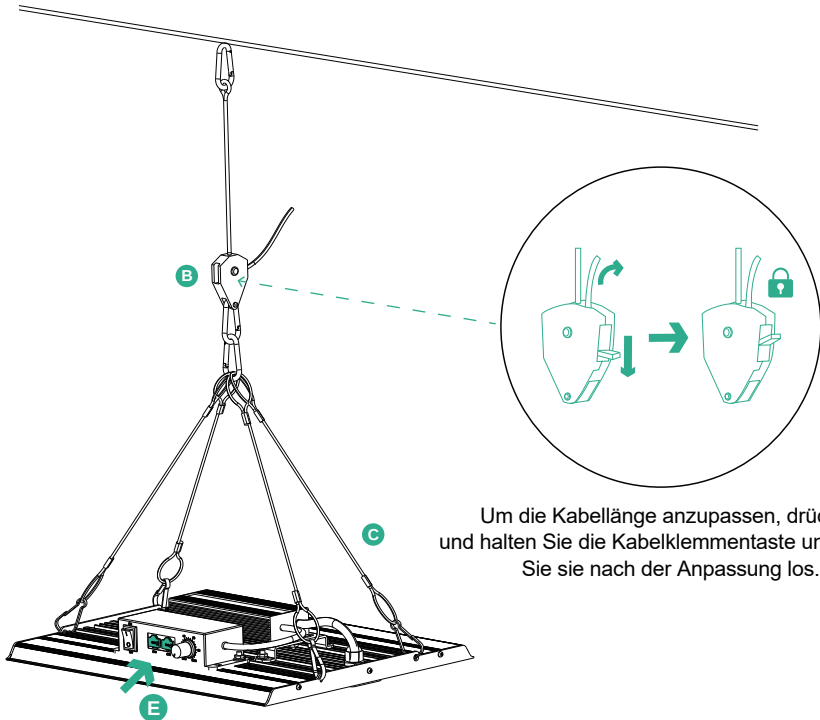


V. OPERATING INSTRUCTIONS

1. Operation Precautions

- Do not turn on the main power supply until the circuit connections and installation are confirmed to be correct.
- Avoid stretching the cables to prevent physical damage and ensure the system operates within the rated current and temperature requirements.
- All lights must be installed with the front facing downward, ensuring proper heat dissipation. Do not cover or enclose the light engine or driver.
- A minimum distance of 50 cm must be maintained between the fixture and any combustible materials.
- Do not stare directly at the luminous surface during operation, as prolonged exposure may be harmful to the eyes.
- System AC input voltage range: 220-240Vac
- Maximum operating temperature: 30°C
- Avoid exposure to direct sunlight, high temperatures, and environments with humidity over 80%.
- Due to varying environmental conditions, it is normal for the fixture housing temperature to exceed 50°C during operation.


2. Dimming Controller Instructions

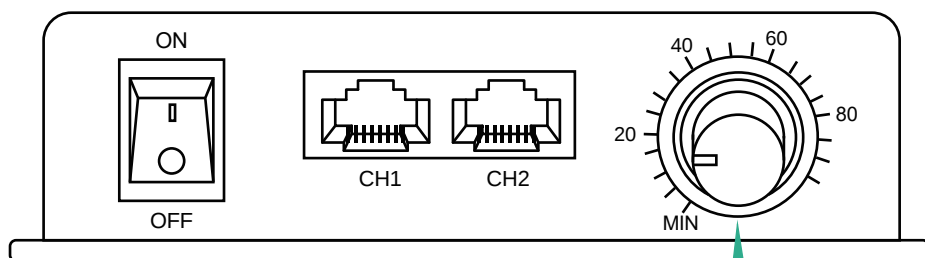

The switch cannot directly control the light.
It only controls the series connection.

Use the dimmer button to adjust
the light brightness between 0%
and 100%.

3. Connection Instructions

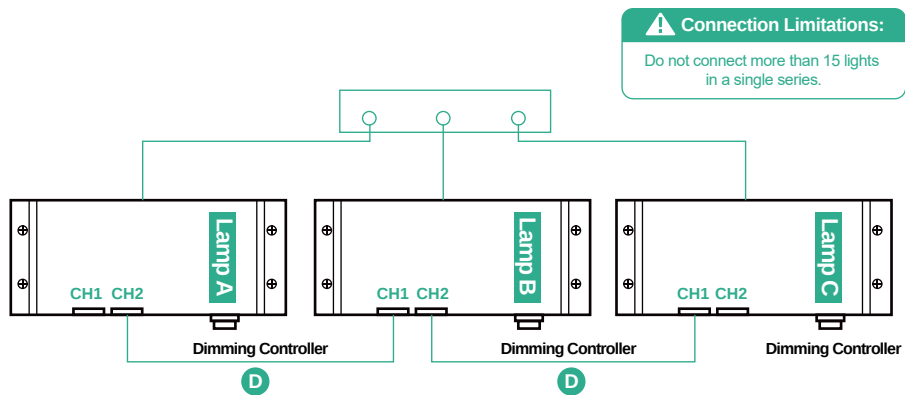

As shown in the diagram above, always connect the output port of the front light (CH2) to the input port of the rear light (CH1). Turn on all the lights and set them to 100%. This allows you to control the power of the subsequent B and C lights using the A light adjustment controller. The power adjustment range is 0%-100%.

4. Growing Tips



	Germination	Seedling	Vegetative	Flowering
Distance (cm)	Hang at 60-76	Hang at 60	Hang at 36-46	Hang at 30-40
Dimming	50%	50%-75%	75%-100%	100%
Time	18 hr ON / 6 hr OFF	18 hr ON / 6 hr OFF	18 hr ON / 6 hr OFF	12 hr ON / 12 hr OFF


(For reference only)

VI. BEDIENUNGSANLEITUNG

1. Vorsichtsmaßnahmen für den Betrieb

- Schalten Sie die Hauptstromversorgung erst ein, wenn die Verdrahtung und Installation als korrekt bestätigt wurden.
- Vermeiden Sie es, die Kabel zu dehnen, um physische Schäden zu verhindern und sicherzustellen, dass das System innerhalb der angegebenen Strom- und Temperaturanforderungen betrieben wird.
- Alle Lampen müssen so installiert werden, dass die Vorderseite nach unten zeigt, um eine ordnungsgemäße Wärmeableitung zu gewährleisten. Decken oder schließen Sie den Lichtmotor oder Treiber nicht ab.
- Ein Mindestabstand von 50 cm muss zwischen der Leuchte und brennbaren Materialien eingehalten werden.
- Starren Sie während des Betriebs nicht direkt auf die leuchtende Oberfläche, da eine längere Exposition schädlich für die Augen sein kann.
- System AC Eingangsspannungsbereich: 220-240 Vac
- Maximale Betriebstemperatur: 30°C
- Vermeiden Sie direkte Sonneneinstrahlung, hohe Temperaturen und Umgebungen mit einer Luftfeuchtigkeit von über 80%.
- Aufgrund unterschiedlicher Umweltbedingungen ist es normal, dass die Temperatur des Leuchtgehäuses während des Betriebs 50°C überschreiten kann.

2. Dimmersteuerung Anweisungen

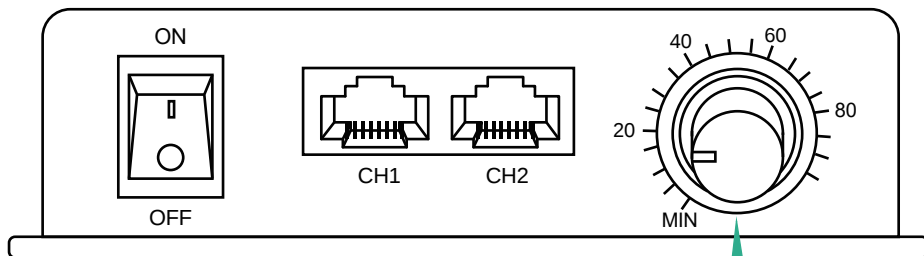


Der Schalter kann das Licht nicht direkt steuern. Er steuert nur die Reihenschaltung.

Verwenden Sie die Dimmer Taste, um die Helligkeit des Lichts zwischen 0% und 100% anzupassen.

3. Verbindungsanweisungen

 **Verbindungsbeschränkungen**

Schließen Sie nicht mehr als 15 Lichter in einer einzigen Serie an.

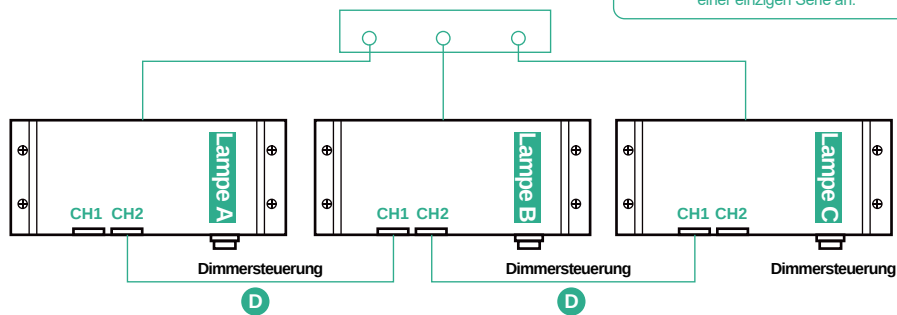

Wie im obigen Diagramm gezeigt, verbinden Sie immer den Ausgangsport des Frontlichts (CH2) mit dem Eingangsport des Rücklichts (CH1). Schalten Sie alle Lichter ein und stellen Sie sie auf 100%. Dadurch können Sie die Leistung der nachfolgenden B- und C-Lichter mit dem Einstellregler des A-Lichts steuern. Der Leistungsregelungsbereich beträgt 0%-100%.

4. Wachstumstipps



	Keimung	Keimling	Vegativ	Blüte
Abstand (cm)	60-76 hängen	60 hängen	36-46 hängen	30-40 hängen
Dimmung	50%	50%-75%	75%-100%	100%
Zeit	18 Std. AN / 6 Std. AUS	18 Std. AN / 6 Std. AUS	18 Std. AN / 6 Std. AUS	12 Std. AN / 12 Std. AUS

(Nur zur Information)

VII. CARE AND MAINTENANCE

Your NovaGrove® LED Grow Light will perform excellently for years with regular care and maintenance. To maintain the quality of your plant lamp's surface, please follow the guidelines and cleaning procedures listed below.

WARNING Always unplug the power cord before cleaning. Never touch the power plug with wet hands.

■ Notice

- Regularly check if dust or dirt has accumulated on the LED lights, as contamination can lead to overheating and performance degradation.
- Always turn off the power before cleaning, maintenance, or during a storm, and wait until all components have cooled down.
- Do not use cleaning agents, abrasives, or any other substances that could damage the LED lights.
- If necessary, clean with 70% isopropyl alcohol and wipe with a non-abrasive cloth.

VIII. RETURN AND WARRANTY

- Unauthorized disassembly, modification, or repair of the lamp is prohibited, as it may pose a safety risk and will void the warranty.
- 15-30 Day Return Policy:
Within 15-30 days of delivery (depending on the platform), returns or exchanges are accepted if the product remains in its original condition and packaging. The shipping cost will be covered by the seller.
- 2 Year Warranty:
If the product experiences any quality issues within 2 years, it can be repaired or replaced free of charge.

IX. CUSTOMER SUPPORT

If for any reason, we have fallen short of your expectations, or if you have any questions and suggestions, please refer to the following contact information, we will do our best to work with you to make sure you are entirely satisfied.

	+49-(0)21513654025
	pfillo.de@gmail.com (Respond within 24 hours)
	Pfillo GmbH Kimplerstraße 340, 47807 Krefeld, Germany (9:00 am - 4:30 pm from Monday to Friday)



Mcombo.de

Product Name: LED Grow Light
Model: E6369-GL-EC10/20
Production Batch: 08429381114465
Country Origin: Made in China
Manufacturer: Pfillo GmbH
Address: Brehmstraße 56,
40239 Düsseldorf, Germany
E-Mail: info.de@newacmelic.com
Tel: 004921511561192



Pfillo GmbH
Brehmstraße 56, 40239 Düsseldorf, Germany
info.de@newacmelic.com
004921511561192

